

# INTRAFORM® LOW PROFILE






### INTRAFORM® LOW PROFILE

Excellent for all areas with restricted matwell recesses or surface mounted applications – offering all the benefits of a heavy duty matting system, in performance, appearance and longevity.

- Heavy duty 12mm aluminium matting system
- Suitable for surface mounted applications
- Compatible with full range of inserts
- Closed construction simple to clean
   and maintain
- Exceptionally hardwearing and durable
- Fully **DDA compliant**, suitable for wheelchair access
- Fully recycled aluminium construction



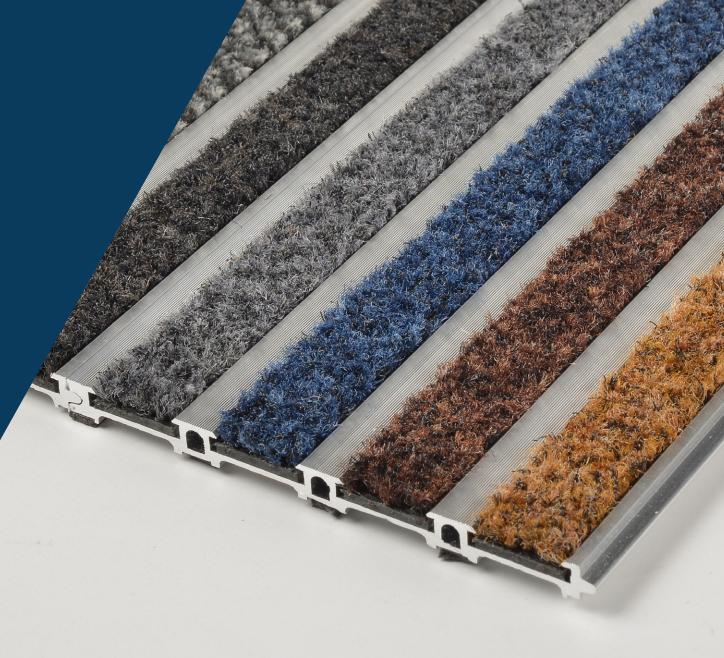




### **SPECIFICATION**

#### INTRAform<sup>®</sup> Low Profile

#### Product Reference INTRAform Low Profile recessed entrance matting Strength Rating Extreme – suitable for areas with heavy foot and wheeled traffic Zonal Location Use Zone 1 inserts for external areas Use Zone 2 inserts for internal areas Combination Zone 1 & 2 inserts can be specified for dual performance Construction 100% recycled aluminium construction. Closed construction Interlocking Plank system. Sustainability 100% recycled aluminum. All fibre inserts recyclable/re-usable 100% Econyl® fibre (Elite, Ultimate & Select) Typical Application High traffic locations such as shopping centres, commercial Offices etc **Design Options** Bespoke anodised to special order Weight 11.3kg/m2 Matwell Framing INT014 & INTR012 Slip Rating Will vary with insert, in excess of PTV 38 Warranty 10 years Uniclass 2015 Pr\_35\_57\_11\_26 Entrance Mats CAWS N10/300 Entrance Matting

#### PROFILE

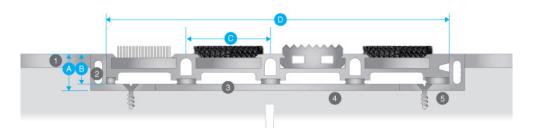

<b>A</b> 14mm	<ol> <li>Finished floor surface</li> </ol>
B 11mm	2 Recessed matwell frame
C 33mm profile	3 Levelling latex to matwell base
D 132.8mm plank size	4 Screed sub-floor
	5 Screw fixings

#### PROFILE COLOUR OPTIONS





### **INSERTS**

#### **INSERTS - ZONE 2**

#### INTRAlux® Elite

Recommended for effective scraping and dirt removal




#### INTRAlux<sup>®</sup> Ultimate



Recommended for rapid moisture absorption



#### INTRAlux<sup>®</sup> Linear



Grey


443 Anthracite

INTRAlux<sup>®</sup> Select



208 Black

#### **INSERTS - ZONE 1**

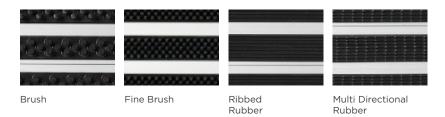



### ENVIRONMENT & SUSTAINABILITY

INTRAsystems has an undeviating commitment to act responsibly in its care of the environment. Working on key projects throughout the UK and Europe, the company is familiar with all environmental ratings such as Ska, BREEAM and WRAP to help clients achieve, and exceed, their sustainability goals.

We are ISO 14001 accredited and all production processes are managed in accordance with the Waste Management Act, with a clear goal to 'reduce the production of waste and its harmful effects.' INTRAsystems regularly reviews its wider operations to minimise negative environmental impacts.

Our Environmental Sustainability Statement sets clear targets for ongoing improvement to ensure the company continues to play its part in helping tackle the climate crisis. Environmental credentials for each fibre option are provided and highlighted throughout this brochure.



BREEAM®

## ECONYL®


#### Benefits of specifying ECONYL® fibre


ECONYL® is regenerated nylon that would otherwise pollute the Earth. It is the same as brand new nylon and can be infinitely recycled, recreated and remoulded. ECONYL® is Cradle-to-Cradle certified and therefore our fibres are eligible for LEED® v4 points, as part of the LEED green building rating system.

### PUREBASE

#### Benefits of specifying PureBase backing

PureBase is a new, PVC-free backing material for entrance matting. It has a significantly lower environmental impact in terms of production processing, greenhouse gas emissions and end of life waste disposal. PureBase is 20% lighter and 3 x more flexible for easier handling and installation.

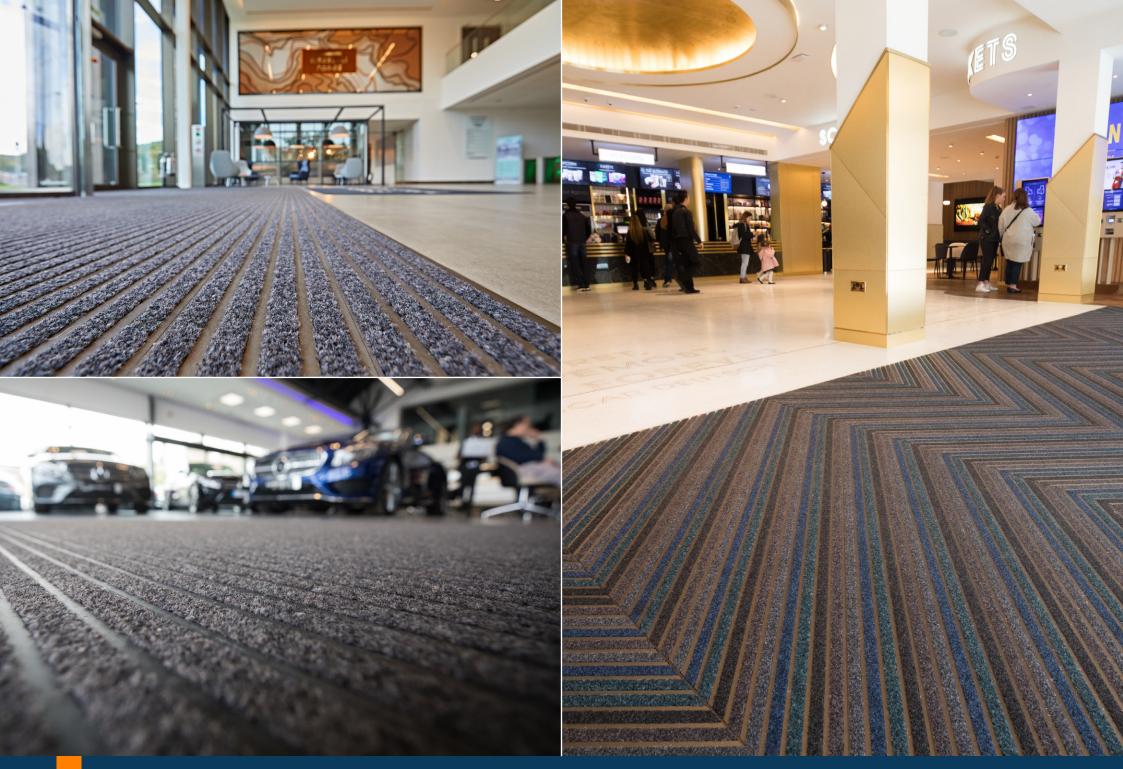

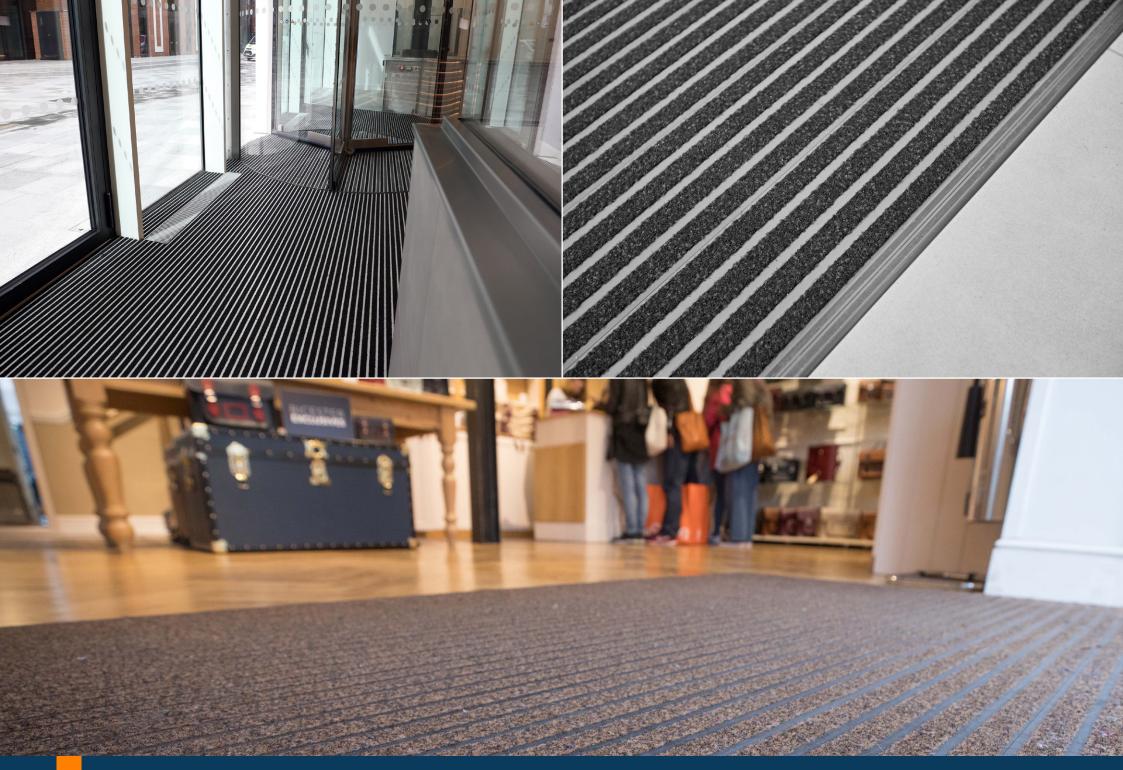









BPi

