






## INTRALUX® ELITE



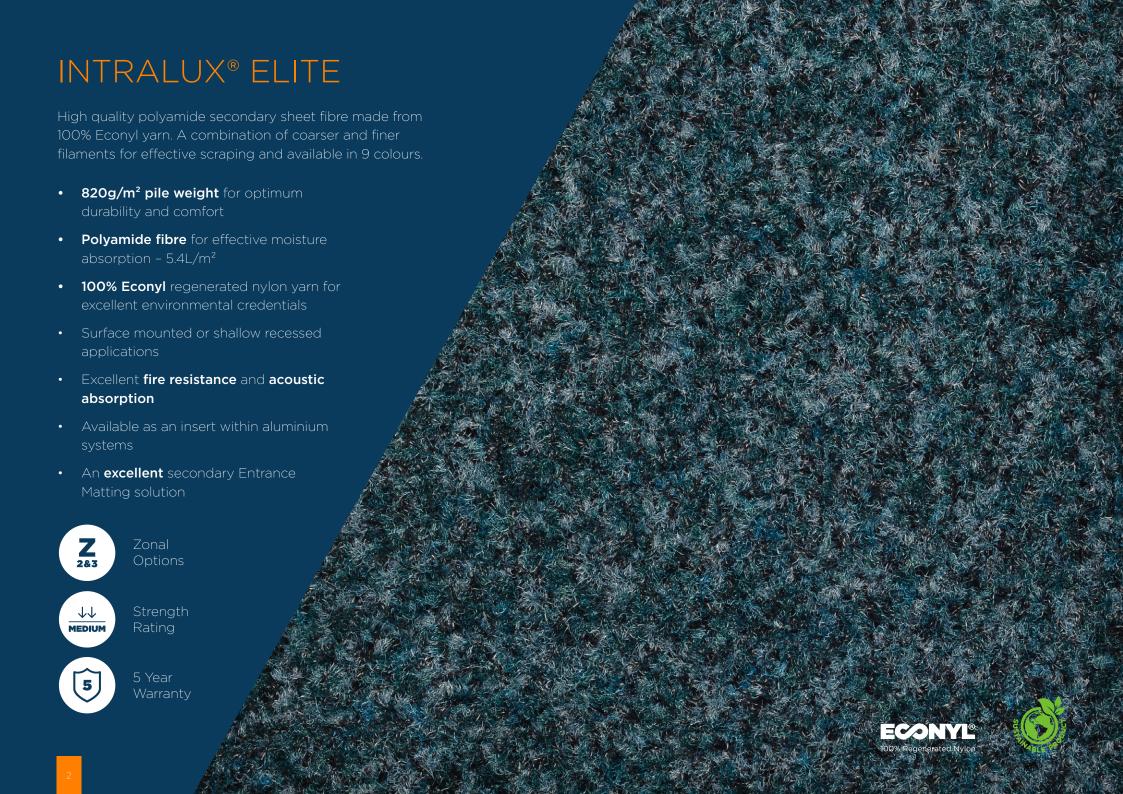

### **SPECIFICATION**

#### INTRAlux® Elite

Product Reference	INTRAlux Elite, Polyamide Sheet Barrier Matting
Material	820g/m² pile weight recycled polyamide fibre with PVC backing
Installation	With surface of mat level with adjoining floor coverings Surface mounted with low profile ramped edging trim
Location	Zones 2+3
Construction	Econyl recycled polyamide yarn (100%) and vinyl backing
Sustainability	100% Econyl fibre
Weight	4.3kg/m <sup>2</sup>
Depth	8.7mm
Fire Rating	Cfl-s1
Roll Size	25m x 2m
Uniclass	Pr_35_57_11_49 Loose-laid matting
CAWS	N10/310 Loose laid matting

#### COLOUR



#### **PROFILE**



- A 2mm
- **B** 6.7mm
- 1 PVC backing
- 2 Fibre pile
- **3** Subfloor



# ENVIRONMENT & SUSTAINABILITY

INTRAsystems has an undeviating commitment to act responsibly in its care of the environment. Working on key projects throughout the UK and Europe, the company is familiar with all environmental ratings such as Ska, BREEAM and WRAP to help clients achieve, and exceed, their sustainability goals.

We are ISO 14001 accredited and all production processes are managed in accordance with the Waste Management Act, with a clear goal to 'reduce the production of waste and its harmful effects.' INTRAsystems regularly reviews its wider operations to minimise negative environmental impacts.

Our Environmental Sustainability Statement sets clear targets for ongoing improvement to ensure the company continues to play its part in helping tackle the climate crisis. Environmental credentials for each fibre option are provided and highlighted throughout this brochure.



**BREEAM®** 



#### Benefits of specifying ECONYL® fibre

ECONYL® is regenerated nylon that would otherwise pollute the Earth. It is the same as brand new nylon and can be infinitely recycled, recreated and remoulded. ECONYL® is Cradle-to-Cradle certified and therefore our fibres are eligible for LEED® v4 points, as part of the LEED green building rating system.















