


## INTRALink<sup>2</sup>

<b>Product Reference</b>	INTRALink <sup>2</sup> PVC Grid Entrance Matting
<b>Strength Rating</b>	High - suitable for areas with heavy foot and wheeled traffic
<b>Zonal Location</b>	High Traffic environments Zone 2 Interior area - with high quality fibre inserts
<b>Construction</b>	Closed construction, interlocking tile format - Tile size 250mm x 250mm. UV resistant, hardwearing 100% recycled PVC - with 100% Econyl recycled polyamide fibre inserts. PVC-free (PureBase) backing option available with Ultimate inserts
<b>Sustainability</b>	100% recycled PVC carrier 100% Econyl Fibre inserts PVC-free PureBase option available with Ultimate inserts All inserts recyclable
<b>Typical Application</b>	High Traffic Locations such as Retail, Sports, Education and Leisure facilities
<b>Design Options</b>	Range of design options including logo application. Packaged in cases of 24 tiles (1.5m <sup>2</sup> ) for ease of delivery and handling
<b>Weight</b>	10.7kg/m <sup>2</sup>
<b>Matwell Framing</b>	INT014 / INTR012
<b>Slip Rating</b>	Will vary with insert, in excess of PTV 38
<b>Warranty</b>	5 years
<b>Uniclass 2015</b>	Pr_35_57_11_26 Entrance Mats
<b>CAWS</b>	N10 / 300 Entrance Matting

## PROFILE

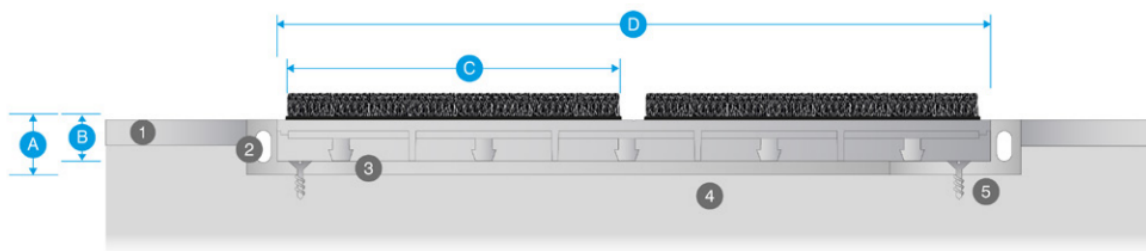

A	14mm	1	Finished Floor surface
B	12mm	2	Recessed matwell frame
C	112mm Insert	3	Levelling latex to matwell base
D	250mm Tile Module	4	Screed sub-floor
		5	Screw fixings

For further information please contact us on:

United Kingdom : 01234 314314 | [sales@syncros.co.uk](mailto:sales@syncros.co.uk) | [www.syncros.co.uk](http://www.syncros.co.uk)  
Syncros, 19 Triumph Way, Woburn Road Industrial Estate, Kempston, Bedford, MK42 7QB